

Head Office:

F/S14, Bayint Naung Road,  
Shwe Sabi Yeik Mon,  
Kamayut Township,  
Yangon, Myanmar

Factory:

Blk-94 (A+B), 42nd Quarter,  
Kha Yae Pin Street,  
Industrial Estate,  
Shwe Pyi Tha Township,  
Yangon, Myanmar


Hotline :09420077507/09780002400

## 38B19L/R (NS40Z/ZL)



## Dimensions (mm)

Length(L)	Width(W)	Height(H)	T. Height(TH)
185 ±2	126 ±2	201 ±2	221 ±2

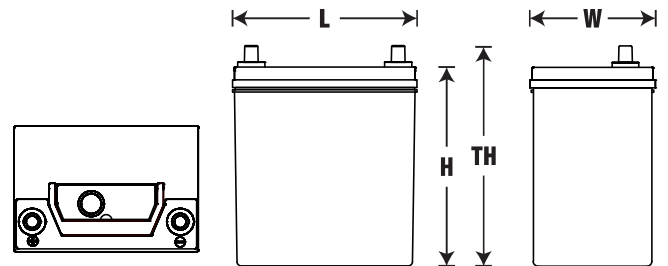


## Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	35 Ah	
Dimension	Length	185 ±2 mm
	Width	126 ±2 mm
	Container Height	201 ±2 mm
	Total Height	221 ±2 mm
Weight (approximate)	10.0 Kg	
Terminal Design	T1	
Cell Layout	0/1	
Hold Down	Choice of Yes/No	
Case	PP - Black	
Cover	PP - Black	
Handle	PP - Red	

## Electrical Specification


Rated Capacity (20 Hour Rate @ 1.75 A)	35 Ah
Reserve Capacity	43 Min.
Cold Cranking Performance @ -18°C (0°F)	290 A

## Discharged Characteristics @ 25 °C (70°F)

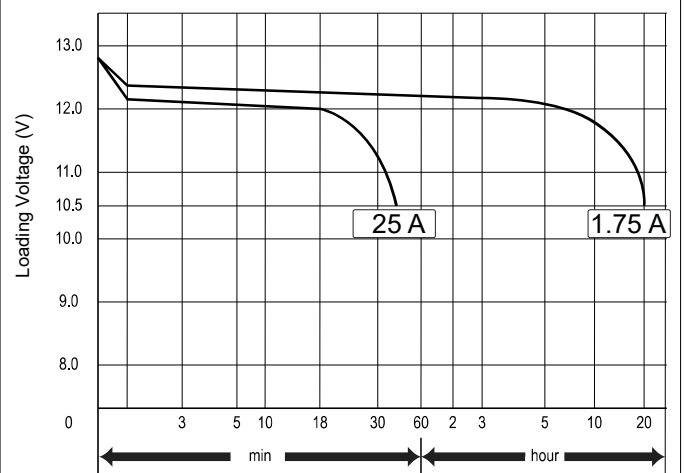


## Terminal Design

Type	ØD	
	Positive	Negative
T1	14.7 <sup>0</sup> <sub>-0.3</sub>	13.0 <sup>0</sup> <sub>-0.3</sub>



## Cell Layout



## Discharged Characteristics @ -18 °C (0°F)

