

Head Office:
F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar
Hotline :09420077507/09780002400


Factory:
Blk-94 (A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

75D31L/R (N70Z/ZL)



Dimensions (mm)

Length (L)	Width (W)	Height (H)	T. Height (TH)
303 ± 2	172 ± 2	201 ± 2	224 ± 2

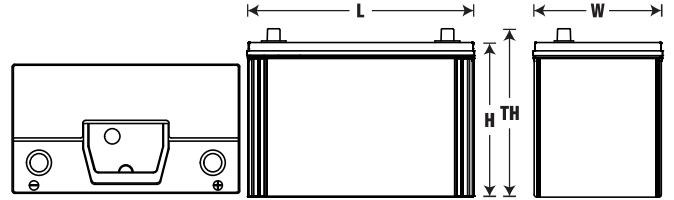


Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	75 Ah	
Dimension	Length	303 ± 2 mm
	Width	172 ± 2 mm
	Container Height	201 ± 2 mm
	Total Height	224 ± 2 mm
Weight (approximate)	20.0 Kg	
Terminal Design	T2	
Cell Layout	0/1	
Hold Down	Not Available	
Case	PP - Black	
Cover	PP - Black	
Handle	PP - Red	

Electrical Specification

Rated Capacity (20 Hour Rate @ 3.75 A)	75 Ah
Reserve Capacity	116 Min
Cold Cranking Performance @ -18°C (0°F)	550 A


Discharged Characteristics @ 25°C (70°F)

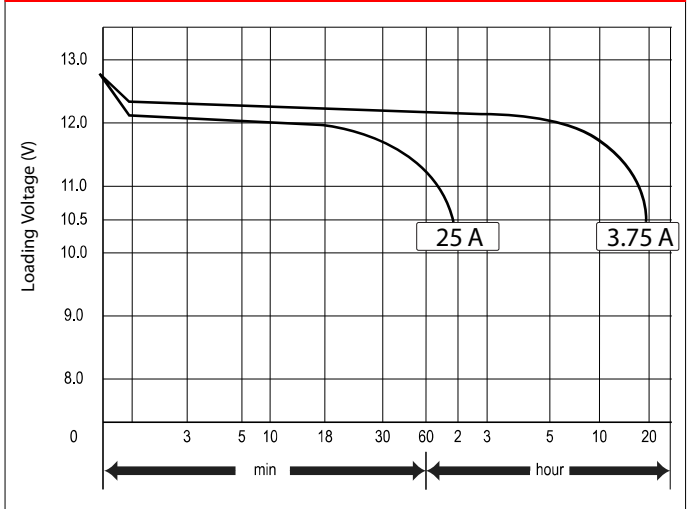

Terminal Design

Type	ØD	
	Positive	Negative
T2	19.5 ⁰ _{0.3}	17.9 ⁰ _{0.3}

Cell Layout



Discharged Characteristics @ -18°C (0°F)

