


65D26L/R (N50Z/ZL)



Dimensions (mm)

Length (L)	Width (W)	Height (H)	T. Height (TH)
260 ±2	172 ±2	201 ±2	224 ±2

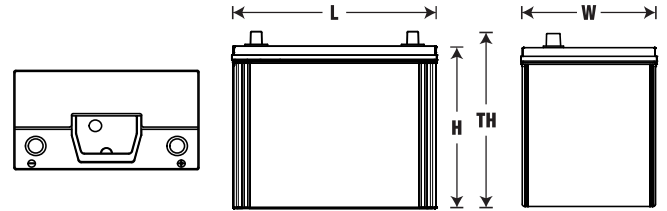


Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	65 Ah	
Dimension	Length	260 ±2 mm
	Width	172 ±2 mm
	Container Height	201 ±2 mm
	Total Height	224 ±2 mm
Weight (approximate)	17.6 Kg	
Terminal Design	T2	
Cell Layout	0/1	
Hold Down	Not Available	
Case	PP - Black	
Cover	PP - Black	
Handle	PP - Red	

Electrical Specification

Rated Capacity (20 Hour Rate @ 3.25 A)	65 Ah
Reserve Capacity	89 Min
Cold Cranking Performance @ -18°C (0°F)	480 A

Discharged Characteristics @ 25°C (70°F)

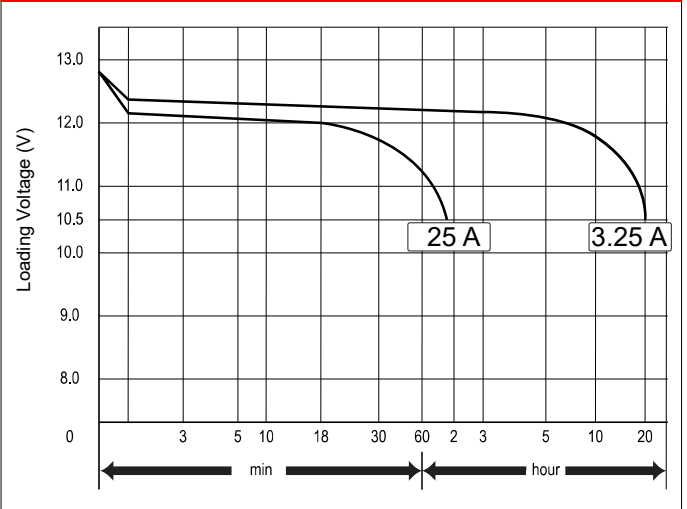

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ^{0.3}	17.9 ^{0.3}

Discharged Characteristics @ -18°C (0°F)

