

Head Office:
F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar
Hotline : 09420077507


Factory:
Blk-94 (A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

N150/145G51



Dimensions (mm)

Length (L)	Width (W)	Height (H)	T. Height (TH)
503 ± 2	220 ± 2	210 ± 2	236 ± 2

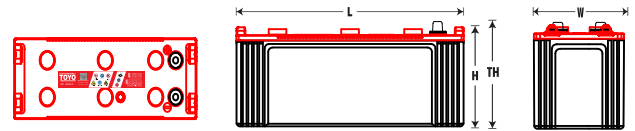


Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	150 Ah	
Dimension	Length	503 ±2 mm
	Width	220 ±2 mm
	Container Height	210 ±2 mm
	Total Height	236 ±2 mm
Weight (Approximate)	40 Kg	
Acid	1.28 g/cm ³ (25°C)	
Terminal Design	T2	
Cell Layout	4	
Hold Down	Not Available	
Case	PP - Black	
Cover	PP - Red	
Handle	Rope Handle	

Electrical Specification

Rated Capacity (20 Hour Rate @ 7.50 A)	150 Ah
Reserve Capacity	290 Min
Cold Cranking Performance @ -18°C (0°F)	1000 A

Discharged Characteristics @ 25°C (70°F)

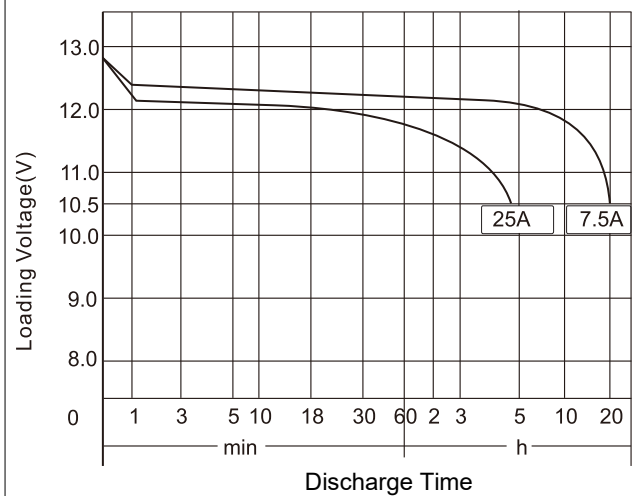

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ^{0.3}	17.9 ^{0.3}

Discharged Characteristics @ -18°C (0°F)

