

Head Office:  
F/S14, Bayint Naung Road,  
Shwe Sabi Yeik Mon,  
Kamayut Township,  
Yangon, Myanmar

Factory:  
Blk-94 (A+B), 42nd Quarter,  
Kha Yae Pin Street,  
Industrial Estate,  
Shwe Pyi Tha Township,  
Yangon, Myanmar


Hotline :09420077507/09780002400

## DIN75-LN3-57545



## Dimensions (mm)

Length(L)	Width(W)	Height(H)	T. Height(TH)
276 ± 2	175 ± 2	190 ± 2	190 ± 2

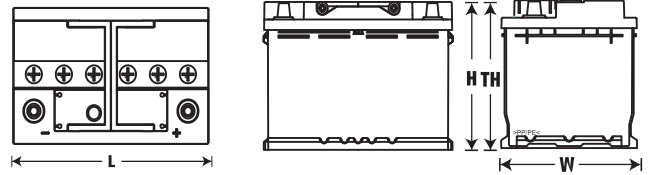


## Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	75 Ah	
Dimension	Length	276 ± 2 mm
	Width	175 ± 2 mm
	Height	190 ± 2 mm
	Total Height	190 ± 2 mm
Weight (approximate)	17.8 Kg	
Terminal Design	T2	
Cell Layout	0/1	
Hold Down	B13	
Case	PP - Black	
Cover	PP - Black	
Handle	PP - Red	

## Electrical Specification

Rated Capacity (20 Hour Rate @ 3.75A)	75 Ah
Reserve Capacity	126 Min
Cold Cranking Performance @ -18°C (0°F)	620 A

## Discharged Characteristics @ 25°C (70°F)

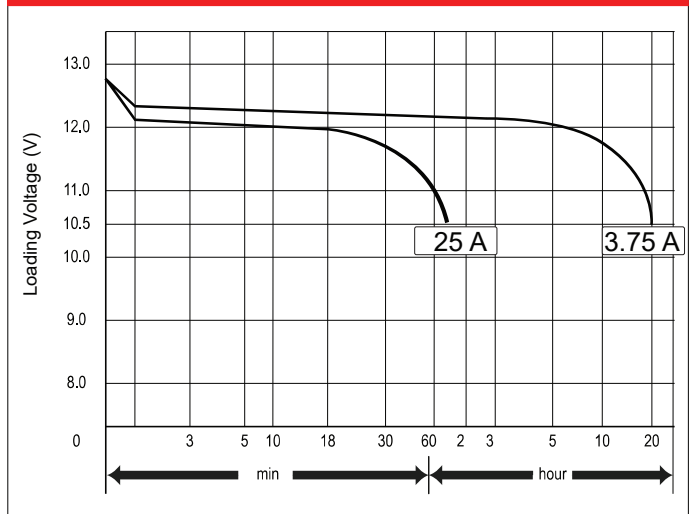

## Terminal Design

## Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 <sup>0</sup> <sub>-0.3</sub>	17.9 <sup>0</sup> <sub>-0.3</sub>

T2	
Positive	Negative
17.0 mm	17.0 mm
19.5 mm	17.9 mm

## Discharged Characteristics @ -18°C (0°F)

