

Head Office:
F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar
Hotline :09420077507/09780002400


Factory:
Blk-94 (A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

DIN60-LN2-56019



Dimensions (mm)

| Length(L) | Width(W) | Height(H) | T. Height(TH) |
|-----------|----------|-----------|---------------|
| 241 ± 2 | 175 ± 2 | 190 ± 2 | 190 ± 2 |

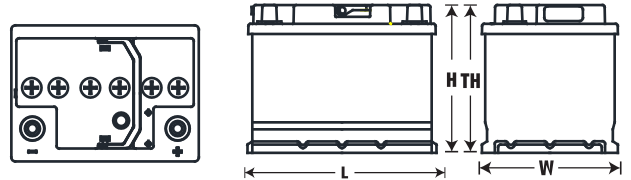


Physical Specification

| | | |
|---------------------------------|--------------|------------|
| Nominal Voltage | 12 V | |
| Nominal Capacity (20 Hour Rate) | 60 Ah | |
| Dimension | Length | 241 ± 2 mm |
| | Width | 175 ± 2 mm |
| | Height | 190 ± 2 mm |
| | Total Height | 190 ± 2 mm |
| Weight (approximate) | 15.3 Kg | |
| Terminal Design | T2 | |
| Cell Layout | 0/1 | |
| Hold Down | B13 | |
| Case | PP - Black | |
| Cover | PP - Black | |
| Handle | PP - Red | |

Electrical Specification

| | |
|---|--------|
| Rated Capacity (20 Hour Rate @ 3.0 A) | 60 Ah |
| Reserve Capacity | 98 Min |
| Cold Cranking Performance @ -18°C (0°F) | 550 A |


Discharged Characteristics @ 25°C (70°F)

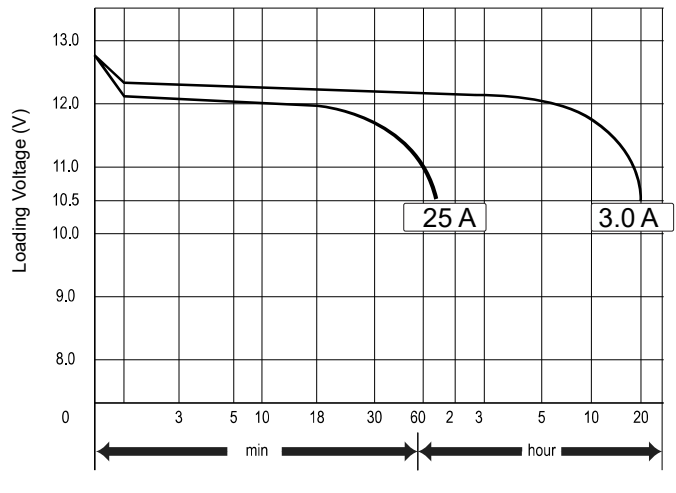

Terminal Design

| Type | ØD | |
|------|-----------------------------------|-----------------------------------|
| | Positive | Negative |
| T2 | 19.5 ⁰ _{-0.3} | 17.9 ⁰ _{-0.3} |

Cell Layout



Discharged Characteristics @ -18°C (0°F)

