

Head Office:

F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar.
Hotline : 09420077507, 09780002400

Factory:


Blk-94(A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

DIN95-LN5-59518



Dimensions (mm)

Length(L)	Width(W)	Height(H)	T. Height(TH)
353 ± 2	175 ± 2	190 ± 2	190 ± 2

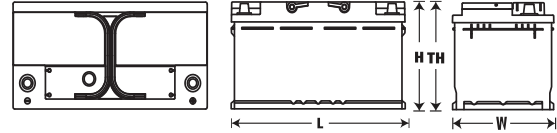


Physical Specification

Nominal Voltage		12 V
Nominal Capacity (20 Hour Rate)		95 Ah
Dimension	Length	353 ± 2 mm
	Width	175 ± 2 mm
	Height	190 ± 2 mm
	Total Height	190 ± 2 mm
Weight (approximate)		23.1 Kg
Terminal Design		T2
Cell Layout		0/1
Hold Down		B13
Case		PP - Black
Cover		PP - Black
Handle		PP - Black

Electrical Specification

Rated Capacity (20 Hour Rate @ 4.75A)	95 Ah
Reserve Capacity	173 Min
Cold Cranking Performance @ -18°C (0°F)	770 A

Discharged Characteristics @ 25°C (70°F)

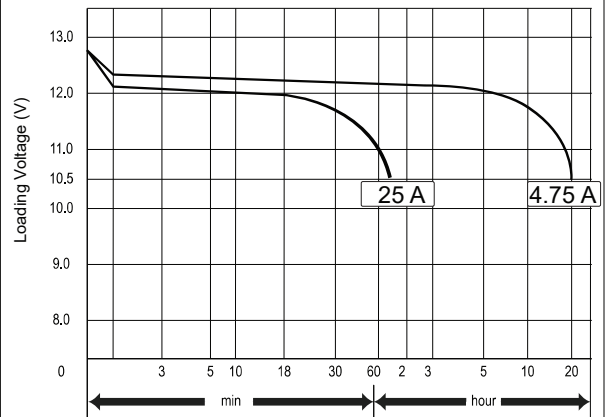

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

T2

Discharged Characteristics @ -18°C (0°F)

