

Head Office:

F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar.
Hotline : 09420077507,09780002400

Factory:

Blk-94(A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar


38B19L/R (NS40Z/ZL)



Physical Specification

Nominal Voltage		12 V
Nominal Capacity (20 Hour Rate)		35 Ah
Dimension	Length	185 ±2 mm
	Width	126 ±2 mm
	Container Height	201 ±2 mm
	Total Height	221 ±2`mm
Weight (approximate)		10.0 Kg
Terminal Design		T1
Cell Layout		0/1
Hold Down		Choice of Yes/No
Case		PP - Black
Cover		PP - Black
Handle		PP - Red


Dimensions (mm)

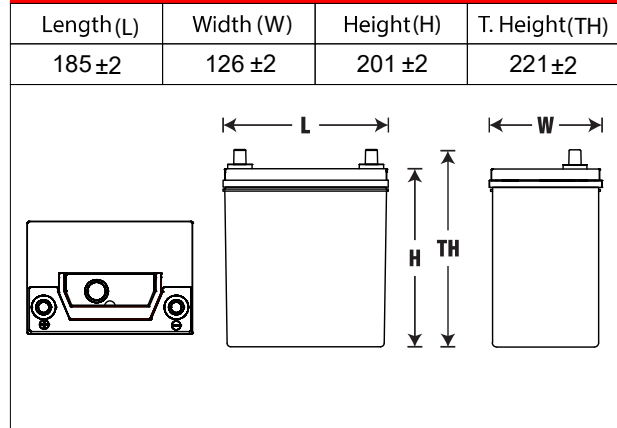

Electrical Specification

Rated Capacity (20 Hour Rate @ 1.75 A)	35 Ah
Reserve Capacity	43 Min.
Cold Cranking Performance @ -18°C (0°F)	290 A

Discharged Characteristics @ 25°C (70°F)

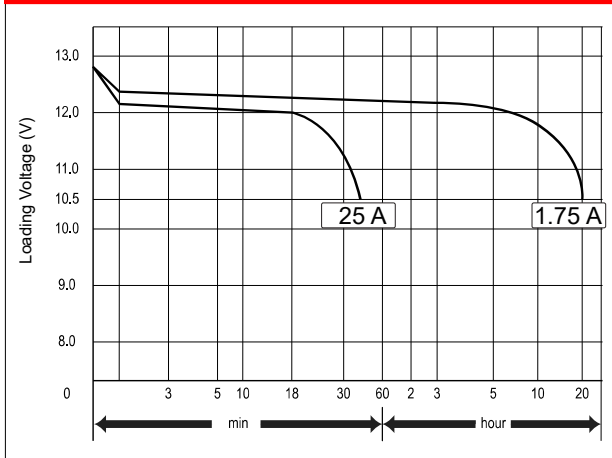

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T1	14.7 ⁰ _{-0.3}	13.0 ⁰ _{-0.3}

Discharged Characteristics @ -18°C (0°F)

