

Head Office:

F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar.
Hotline : 09420077507,09780002400

Factory:


Blk-94(A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

65D26L/R (N50Z/ZL)



Dimensions (mm)

Length (L)	Width (W)	Height (H)	T. Height(TH)
260 ±2	172 ±2	201 ±2	224 ±2

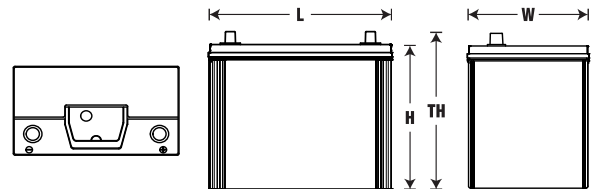


Physical Specification

Nominal Voltage		12 V
Nominal Capacity (20 Hour Rate)		65 Ah
Dimension	Length	260 ±2 mm
	Width	172 ±2 mm
	Container Height	201 ±2 mm
	Total Height	224 ±2 mm
Weight (approximate)		17.6 Kg
Terminal Design		T2
Cell Layout		0/1
Hold Down		Not Available
Case		PP - Black
Cover		PP - Black
Handle		PP - Red

Electrical Specification

Rated Capacity (20 Hour Rate @ 3.25 A)	65 Ah
Reserve Capacity	89 Min
Cold Cranking Performance @ -18°C (0°F)	480 A

Discharged Characteristics @ 25°C (70°F)

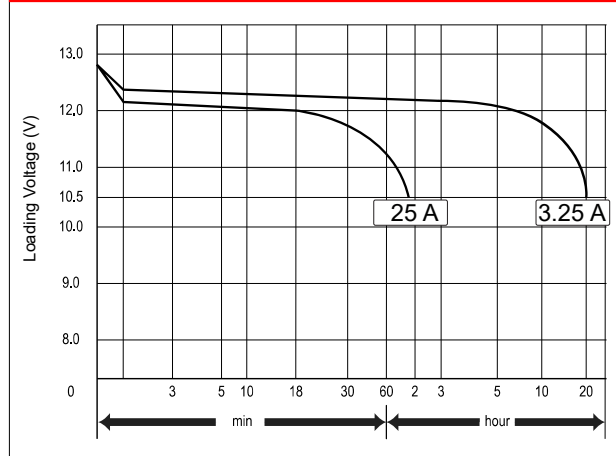

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Discharged Characteristics @ -18°C (0°F)

