

Head Office:

F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar.
Hotline : 09420077507,09780002400

Factory:


Blk-94(A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

80D26L/R



Dimensions (mm)

| Length (L) | Width (W) | Height (H) | T. Height (TH) |
|------------|-----------|------------|----------------|
| 258 ±2 | 170 ±2 | 202 ±2 | 224 ±2 |

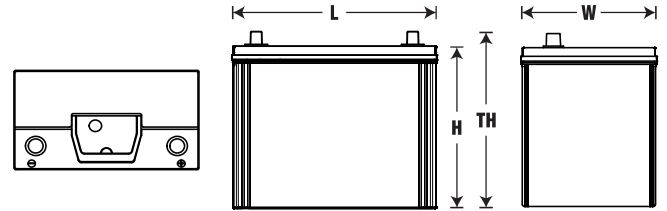


Physical Specification

| | | |
|---------------------------------|------------------|-----------|
| Nominal Voltage | 12 V | |
| Nominal Capacity (20 Hour Rate) | 75 Ah | |
| Dimension | Length | 258 ±2 mm |
| | Width | 170 ±2 mm |
| | Container Height | 202 ±2 mm |
| | Total Height | 224 ±2 mm |
| Weight (approximate) | 17.8 Kg | |
| Terminal Design | T2 | |
| Cell Layout | 0/1 | |
| Hold Down | Not Available | |
| Case | PP - Black | |
| Cover | PP - Black | |
| Handle | PP - Red | |

Electrical Specification

| | |
|---|--------|
| Rated Capacity (20 Hour Rate @ 3.25 A) | 75 Ah |
| Reserve Capacity | 89 Min |
| Cold Cranking Performance @ -18°C (0°F) | 580 A |

Discharged Characteristics @ 25°C (70°F)

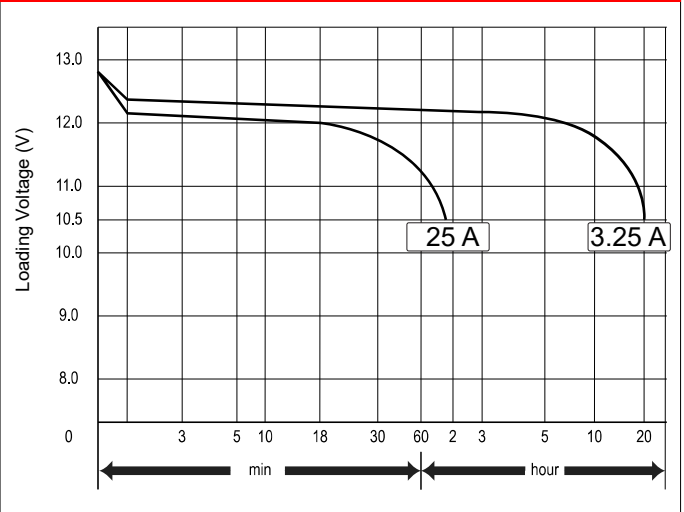

Terminal Design

Cell Layout

| Type | ØD | |
|------|---------------------|---------------------|
| | Positive | Negative |
| T2 | 19.5 ^{0.3} | 17.9 ^{0.3} |

Discharged Characteristics @ -18°C (0°F)

