

Head Office:
F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar
Hotline : 09420077507

Factory:
Blk-94 (A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

N200/190H52




Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	200 Ah	
Dimension	Length	513 ±2 mm
	Width	273 ±2 mm
	Container Height	219 ±2 mm
	Total Height	245 ±2 mm
Weight (Approximate)	55 Kg	
Acid	1.28 g/cm ³ (25°C)	
Terminal Design	T2	
Cell Layout	4	
Hold Down	Not Available	
Case	PP - Black	
Cover	PP - Red	
Handle	Rope Handle	

Terminal Design


Type	ØD	
	Positive	Negative
T2	19.5 ^{0.3}	17.9 ^{0.3}

Cell Layout



Dimensions (mm)


Length (L)	Width (W)	Height (H)	T. Height (TH)
513 ± 2	273 ± 2	219 ± 2	245 ± 2

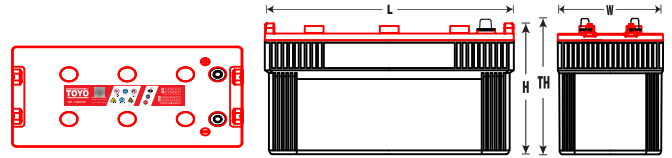

Electrical Specification

Rated Capacity (20 Hour Rate @ 10.00 A)	200 Ah
Reserve Capacity	407 Min
Cold Cranking Performance @ -18°C (0°F)	1200 A

Discharged Characteristics @ 25°C (70°F)

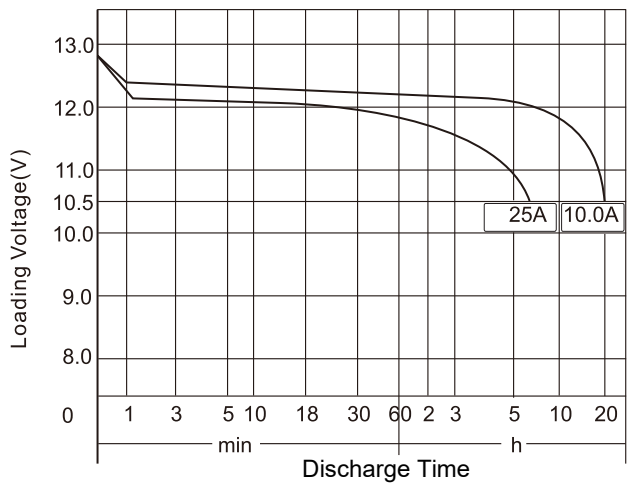

Discharged Characteristics @ -18°C (0°F)

