

Head Office:
F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar
Hotline : 09420077507


Factory:
Blk-94 (A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

N120 / 115F51



Dimensions (mm)

Length	Width	Height	T. Height
500	178	210	236

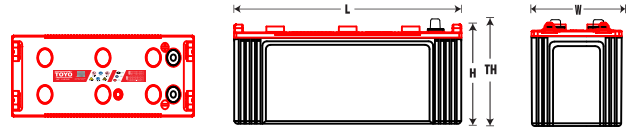


Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	120 Ah	
Dimension	Length	500 ± 2 mm
	Width	178 ± 2 mm
	Container Height	210 ± 2 mm
	Total Height	236 ± 2 mm
Weight (approximate)	33 Kg	
Acid	1.28 g/cm ³ (25°C)	
Terminal Design	T2	
Cell Layout	3/4	
Hold Down	Not Available	
Case	PP - Black	
Cover	PP - Red	
Handle	Rope Handle	

Electrical Specification

Rated Capacity (20 Hour Rate @ 6.00 A)	120 Ah
Reserve Capacity	223 Min.
Cold Cranking Performance @ 0°F (-18°C)	900 A

Discharged Characteristics @ 25°C (70°F)

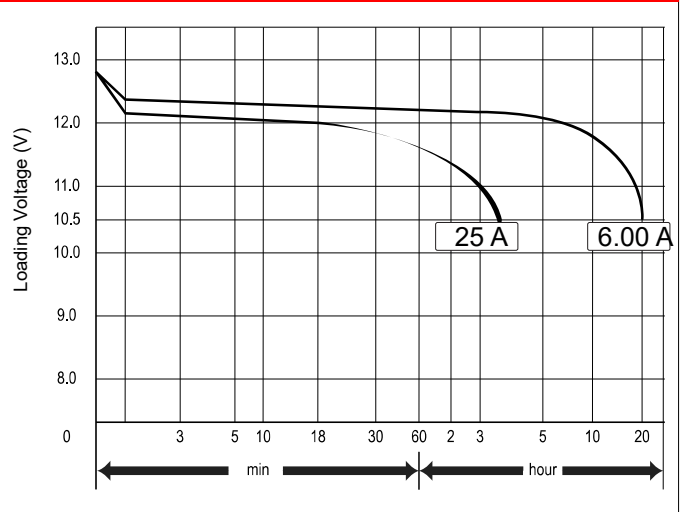

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ^{0.3}	17.9 ^{0.3}

Discharged Characteristics @ -18°C (0°F)

