

Head Office:

F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar

Factory:

Blk-94 (A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

Hotline :09420077507/09780002400

N150 (145G51)



Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	150 Ah	
Dimension	Length	503 ±2 mm
	Width	220 ±2 mm
	Container Height	210 ±2 mm
	Total Height	255 ±2 mm
Weight (Approximate)	24.5 Kg	
Acid	1.25 g/cm ³ (25 °C)	
Acid Vol	12.0 Liter	
Terminal Design	T2	
Cell Layout	4	
Hold Down	Not Available	
Container	PP - Natural	
Cover	PP - Red	
Handle	FIX Handle-Red	


Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Dimensions (mm)


Length (L)	Width (W)	Height (H)	T. Height (TH)
503 ± 2	220 ± 2	210 ± 2	255 ± 2

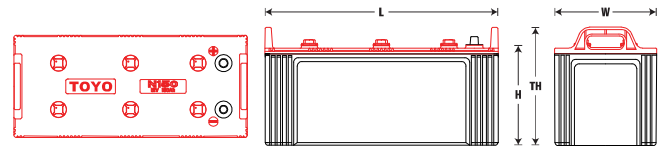

Electrical Specification

Rated Capacity (20 Hour Rate @ 7.50 A)	150 Ah
Reserve Capacity	240 Min
Cold Cranking Performance @ -18°C (0 °F)	685 A

Discharged Characteristics @ 25°C (70°F)

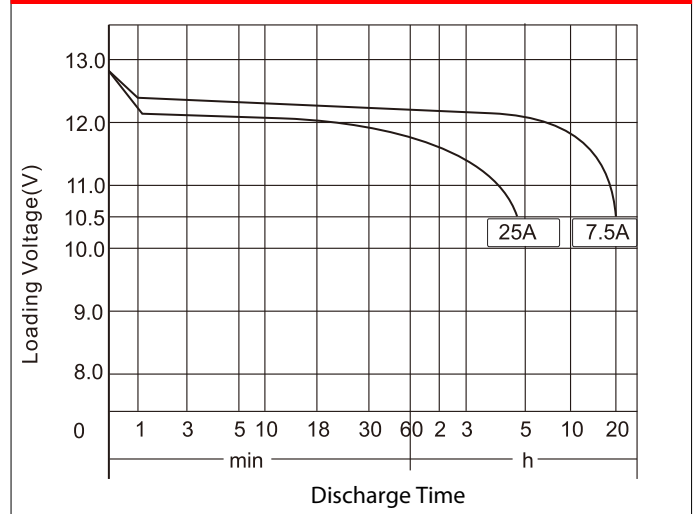

Discharged Characteristics @ -18°C (0°F)

