

Head Office:

F/S14, Bayint Naung Road,
Shwe Sabi Yeik Mon,
Kamayut Township,
Yangon, Myanmar.
Hotline : 09420077507,09780002400

Factory:

Blk-94(A+B), 42nd Quarter,
Kha Yae Pin Street,
Industrial Estate,
Shwe Pyi Tha Township,
Yangon, Myanmar

95E41R/N100



Physical Specification

Nominal Voltage		12 V
Nominal Capacity (20 Hour Rate)		100 Ah
Dimension	Length	406 ±2 mm
	Width	174 ±2 mm
	Container Height	210 ±2 mm
	Total Height	235 ±2 mm
Weight (approximate)		26.5 Kg
Acid		1.28 g/cm³(25°C)
Terminal Design		T2
Cell Layout		1
Hold Down		Not Available
Case		PP - Black
Cover		PP - Red
Handle		PP - Red


Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Dimensions (mm)


Length (L)	Width (W)	Height (H)	T. Height(TH)
406 ± 2	174 ± 2	210 ± 2	235 ± 2

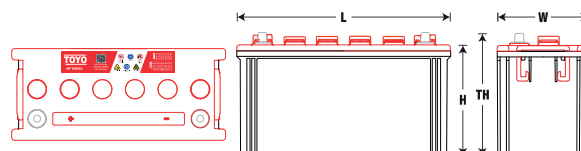

Electrical Specification

Rated Capacity (20 Hour Rate @ 5.00 A)	100 Ah
Reserve Capacity	150 Min
Cold Cranking Performance @ -18°C (0°F)	780 A

Discharged Characteristics @ 25°C (70°F)

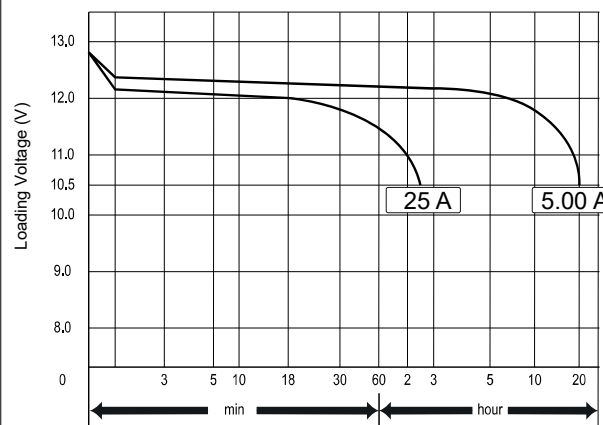

Discharged Characteristics @ -18°C (0°F)

