

N50Z/ZL (55D26)



Physical Specification

Nominal Voltage		12 V
Nominal Capacity (20 Hour Rate)		60 Ah
Dimension	Length	256 ±2 mm
	Width	171 ±2 mm
	Container Height	201 ±2 mm
	Total Height	225 ±2 mm
Weight (approximate)		9.7 Kg
Acid		1.25 g/cm³(25°C)
Acid Vol		4.6Liter
Terminal Design		T2
Cell Layout		0/1
Hold Down		Not Available
Container		PP - Natural
Cover		PP - Red
Handle		PP - Red

Terminal Design

Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Positive: 19.5 mm
Negative: 17.9 mm

0
+

1
+


Dimensions (mm)

Length (L)	Width (W)	Height (H)	T. Height (TH)
256 ± 2	171 ± 2	201 ± 2	225 ± 2

Electrical Specification

Rated Capacity (20 Hour Rate @ 3.00 A)	60 Ah
Reserve Capacity	89 Min
Cold Cranking Performance @ -18°C (0°F)	290 A

Discharged Characteristics @ 25°C (70°F)

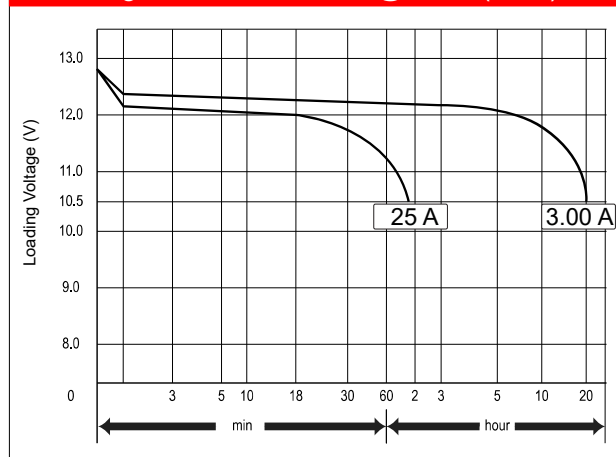

Discharged Characteristics @ -18°C (0°F)

